


# IS5

Trailer-Mounted Concrete Spraying Machine

# Titan

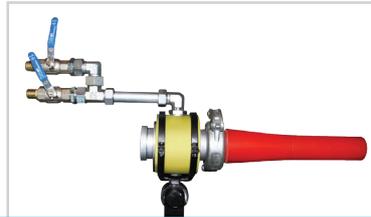

**Titan Makina Ltd. Şti.**

1160. Sok. No:9 Ostim 06370 Ankara / Turkey

Phone : +90 312 354 9977 • Fax : +90 312 385 5611 • E-mail : titan@titanltd.com.tr • Web : www.titanltd.com.tr

# IS5

## Trailer-Mounted Concrete Spraying Machine

# Titan

### TECHNICAL SPECIFICATIONS

#### CONCRETE PUMP

Make / Model:	Titan hydraulically driven double piston pump
Max. Capacity:	10 m <sup>3</sup> /h (theoretical)
Max. Concrete Pressure:	50 bar
Max. Hydraulic Pressure:	200 bar
Power:	Electric driven - 18,5 kW at 400 V - 50 Hz
Concrete Cylinder:	160 x 350 mm
Outlet Diameter:	5"

#### HOPPER

Hopper Capacity:	250 l
Filling Height:	1400 mm
Working Light:	55 W halogen
Vibrator:	Hydraulically driven
Bottom Shutter:	Hydraulically driven
Hopper Agitator:	Hydraulically driven

#### DOSING SYSTEM

Type:	Peristaltic hose pump
Power:	Electric driven - 1,1 kW
Control System:	Frequency converter
Max. Flow Rate:	450 l/h
Max. Working Pressure:	8 bar
Additive Tank:	160 l

#### WASHER



Water Pump:	Hydraulically driven
Pressure:	25 bar
Flow Rate:	16 l/min
Hose Length:	8 m
Water Tank:	85 l

#### DIMENSIONS & WEIGHT

Dry Weight:	2.600 kg
Length:	2.560 mm
Width:	1.900 mm
Height:	1.880 mm

#### MISCELLANEOUS

Hose Length and Diameter:	10 m 3" + 5 m 2,5" rubber hose
Tyres:	7.50 - 16
	Nozzle stand
	Tow bar
	Manual stabiliser
	4 pcs. lifting points
	Removable wheels for skid-mounted use

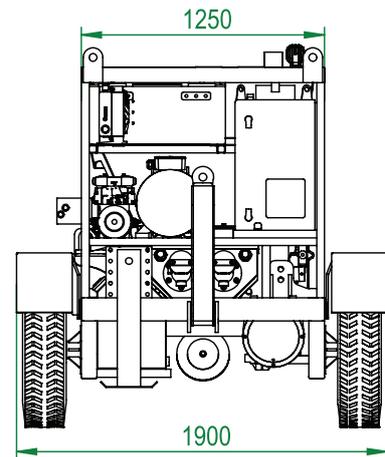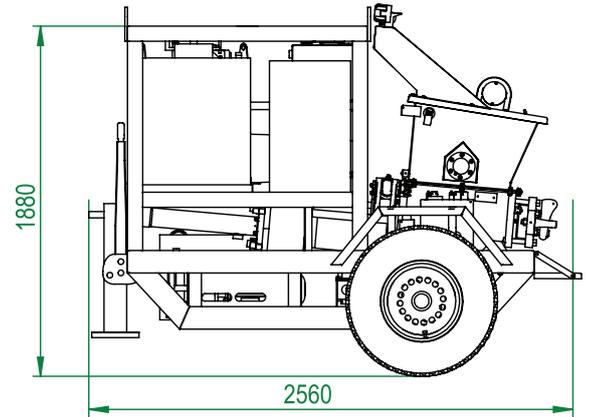

**Titan Makina Ltd. Şti.**

1160. Sok. No:9 Ostim 06370 Ankara / Turkey

Phone : +90 312 354 9977 • Fax : +90 312 385 5611 • E-mail : titan@titanltd.com.tr • Web : www.titanltd.com.tr